



i • RETROFIT

IR-RTSBXX-XXX

SHOE BOX FIXTURE LED RETROFIT KIT



MEDIUM



LARGE





i • RETROFIT

SHOE BOX FIXTURE LED RETROFIT KIT

IR-RTSBXX-XXX



LED RETROFIT KITS

| Part Number | Watt | Lumens(±10%) | PF | CRI | Voltage | CCT | IP Rating |
|----------------|------|--------------|------|-----|------------|-----------------------|-----------|
| IR-RTSB16-100W | 100W | 13000lm | >0.9 | >80 | 100-277VAC | 3,000, 4,000 5,000 | IP65 |
| IR-RTSB16-120W | 120W | 15000lm | >0.9 | >80 | 100-277VAC | 3,000, 4,000 5,000 | IP65 |
| IR-RTSB16-150W | 150W | 19000lm | >0.9 | >80 | 100-277VAC | 3,000, 4,000 5,000 | IP65 |
| IR-RTSB23-300W | 300W | 39000lm | >0.9 | >80 | 100-277VAC | 3,000, 4,000 5,000 | IP65 |

- High pressure die cast aluminum gearbox, Anti-static powder coat finish.
- Beautiful appearance, Easy Installation Maintenance Free.
- Slip fitter, U-bracket and straight arm are available.

- High efficient Cree or Nichia LED Chip module ensures.
- IP Rating: IP65 Module.









i • RETROFIT

SHOE BOX FIXTURE LED RETROFIT KIT



IR-RTSBXX-XXX

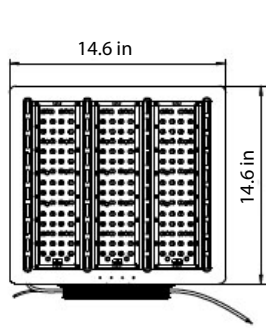


100W
120W
150W

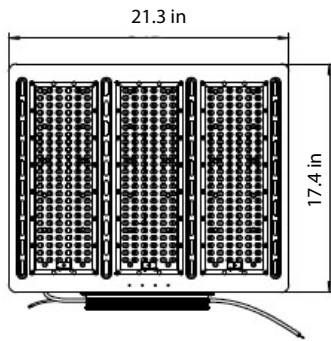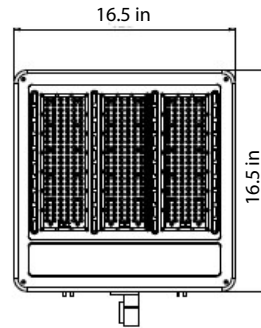


300W

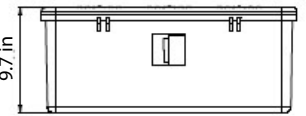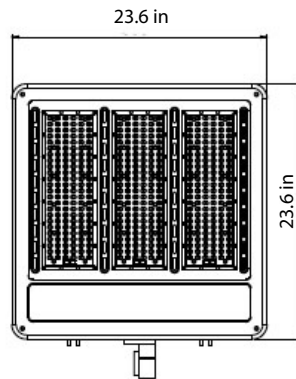


1. Take off surface screw

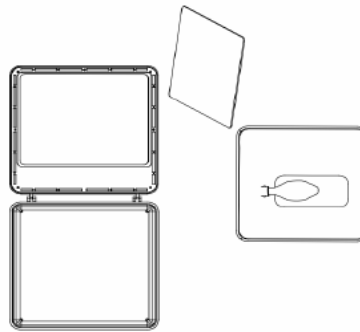


2. Remove HID bulb, ballast, all components inside of the box and surface glass cover

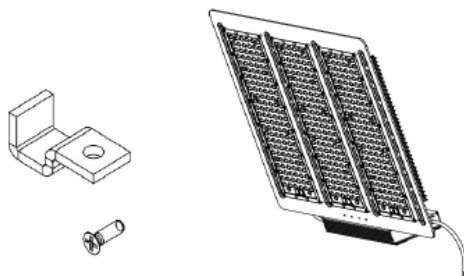

3. Take out LED retrofit kit module and M3 screw from our standard packaging

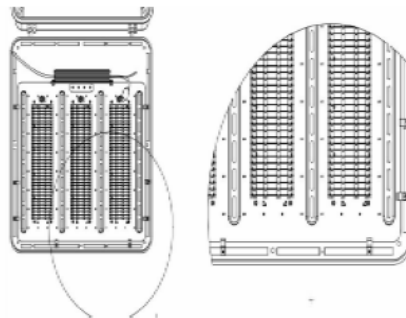

4. As shown, fixed the IP65 waterproof retrofit kit with M3 screw to replace glass cover.

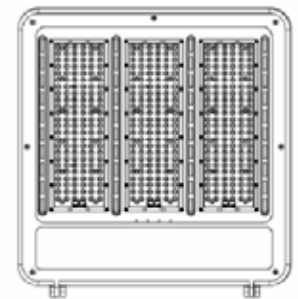

5. Screw cover back on and test

